

## INSTRUCTIONS for INSTALLATION and MAINTENANCE “BUILT-IN VIEWING BOXES”

The viewing box can support RX films with grip rollers in the upper part.

### INSTALLATION :

- Unscrew the frame from the box
- Prepare the niche in the wall with the measures shown in the table below
- Fix the box to the wall applying fischer and screws to the holes in the fastening lugs
- Connect the line cable to the terminal board, by passing it through the appropriate hole
- Connect the grounding wire to the frame
- Screw the frame to the box



### MAINTENANCE :

The viewing box does not need any particular maintenance.

- To clean it use soft cloth and products that do not contain alcohol or solvents

To reach the inner parts, perform the following operations:

- Switch off the viewing box
- Unscrew the frame from the box
- Disconnect the grounding wire from the frame

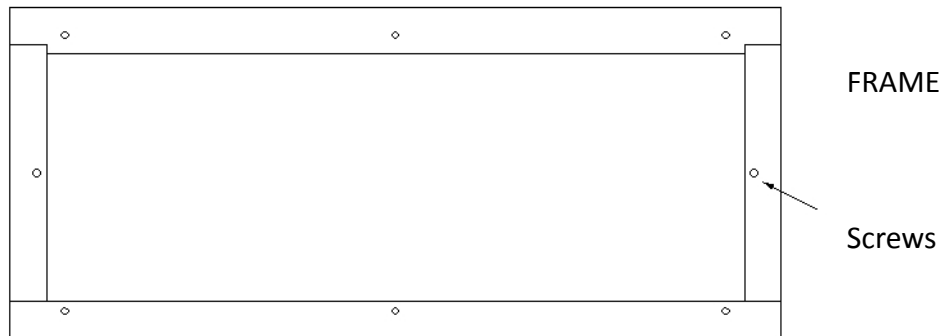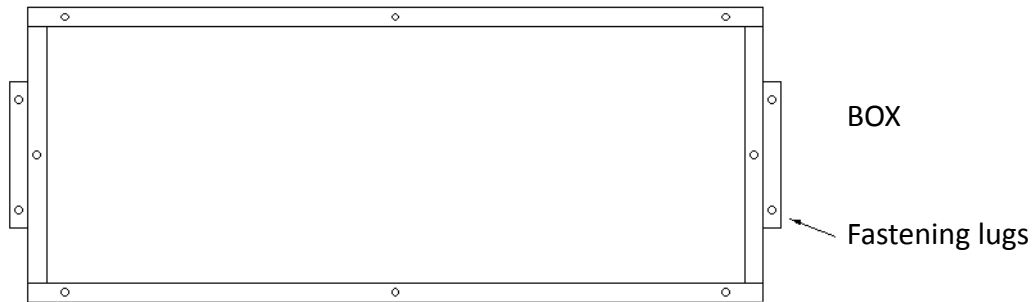

Models Light Cm	Box Measures High/Lenght /Depth Cm	Niche Measures High/Lenght /Depth Cm	Frame Measures High/Lenght /Depth Cm	Power Supply Voltage V/Hz	Power Input W	Absorbed Current A	Fuses Nr/A	Lamps Nr/W	Starter Nr/W/V	Ballasts Nr/W	Packaging Volume M <sup>3</sup>	Weight Packing Incl. Kg
90x45	51/95/11,5	52/96/12,5	58/102/1,7	230/50	145	1,3	2/2	3/30	3/4-80/220-240	3/36-40	0,19	12
120x45	51/125/11,5	52/126/12,5	58/132/1,7	230/50	135	1,3	2/2	3/36	3/4-80/220-240	3/36-40	0,242	16
150x45	51/155/11,5	52/156/12,5	58/162/1,7	230/50	212	2,2	2/2,5	3/58	3/4-80/220-240	3/58-65	0,294	20